

LEADERS IN DESIGN - AUSTRALIAN MADE

TRAILCO®

TCS20 CAMDRIVE EFFLUENT IRRIGATOR

Capable of spraying liquid effluent or water over an area 200 metres long by 25 metres wide in one unattended run.

**Designed to pull up to 100 metres of 52mm lay-flat or polythene hose.*

**Simple sturdy design gives outstanding reliability and performance.*




GROSS APPLICATION CALCULATED AT 20 METRE LANE SPACING

OUTPUT		5.5 HOURS	11 HOURS RUN	22 HOURS RUN
90lpm	20gpm	7.4mm	14.8mm	29.4mm
135lpm	30gpm	11.1mm	22.2mm	44.4mm
182lpm	40gpm	14.8mm	29.4mm	59.1mm
225lpm	50gpm	18.5mm	37.0mm	74.1mm
295lpm	65gpm	23.8mm	47.6mm	96.2mm
340lpm	75gpm	27.6mm	55.6mm	111.2mm

- *Easy to Operate*
- *Trailco Camdrive*
- *Automatic Travel Shut-off*
- *Accurate, Automotive Type Steering*
- *Easy to Service*
- *Low Pressure Operation*
- *Sturdy Construction - Built to Last*
- *Mounted on 4 wheels for Stability*
- *Easy to clean Nozzles*
- *All Main Parts are Galvanised or Plated*
- *Optional Extras: Hand or P.T.O. Re-wind Hose reel to suit lay-flat hose*

TYPICAL FIELD LAYOUT

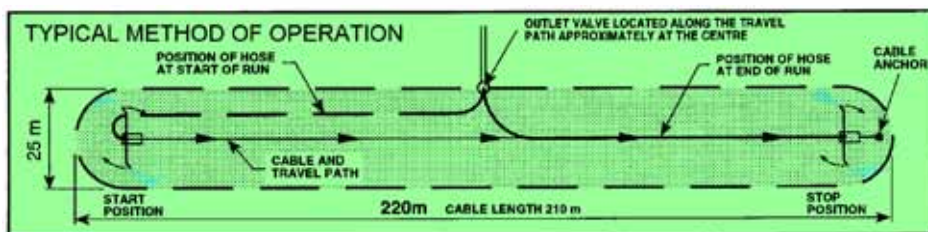


TRAILCO TCS20

CAMDRIIVE EFFLUENT IRRIGATOR

Capable of spraying liquid effluent or water over an area 200 metres long by 25 metres wide in one unattended run.



TCS20 Basic Model

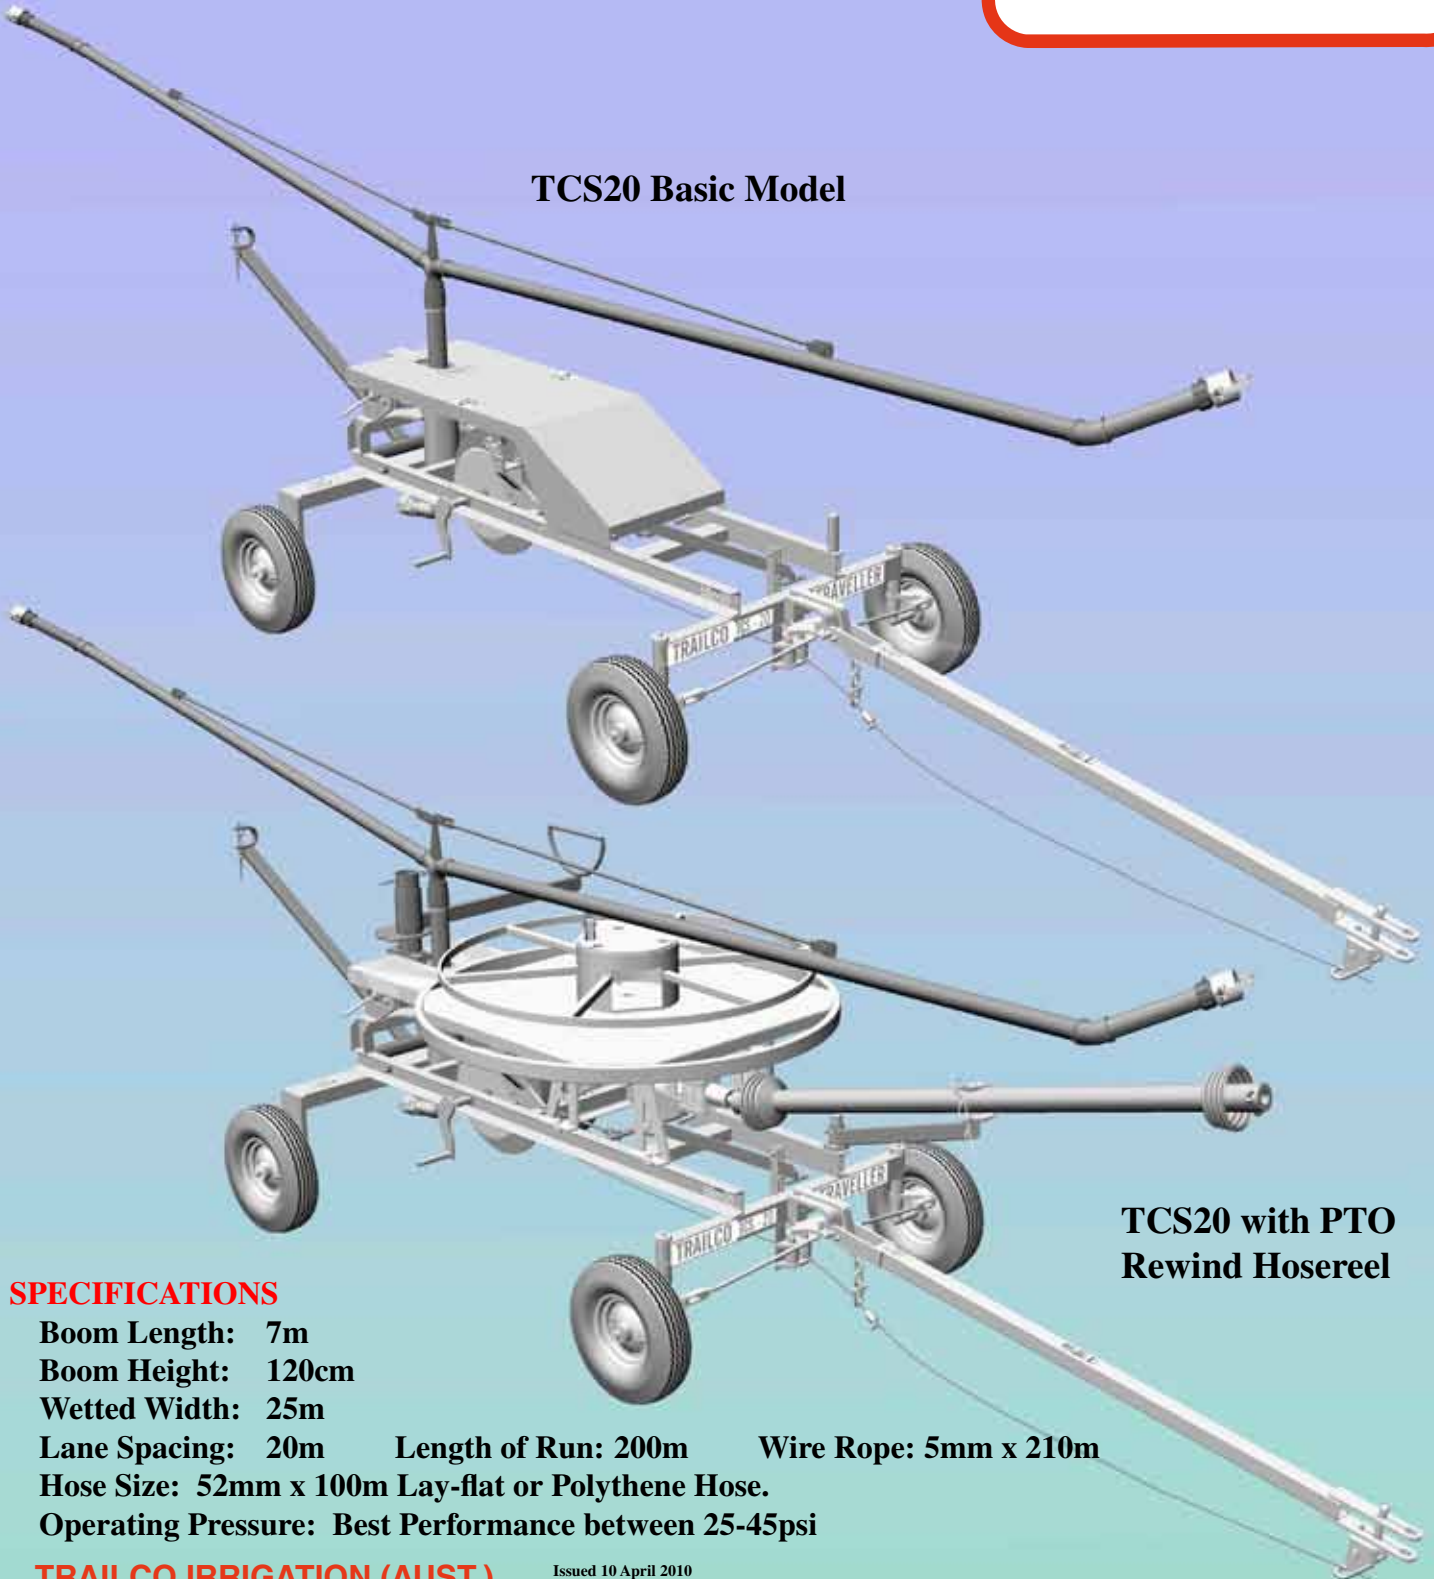

TCS20 with PTO
Rewind Hosereel

SPECIFICATIONS

- Boom Length: 7m
- Boom Height: 120cm
- Wetted Width: 25m
- Lane Spacing: 20m
- Length of Run: 200m
- Wire Rope: 5mm x 210m
- Hose Size: 52mm x 100m Lay-flat or Polythene Hose.
- Operating Pressure: Best Performance between 25-45psi

TRAILCO IRRIGATION (AUST.)

ABN 35 480 117 190

1289 KINGSFORD SMITH DRIVE
PINKENBA QLD. 4008

Phone (07) 3260 1828 Fax (07) 3260 1877
International Callers: Country (61) Area (7)

www.trailco.com.au sales@trailco.com.au

Issued 10 April 2010

SOLD AND SERVICED BY:

